


159.00 EUR  
incl. 19% VAT, plus [shipping](#)

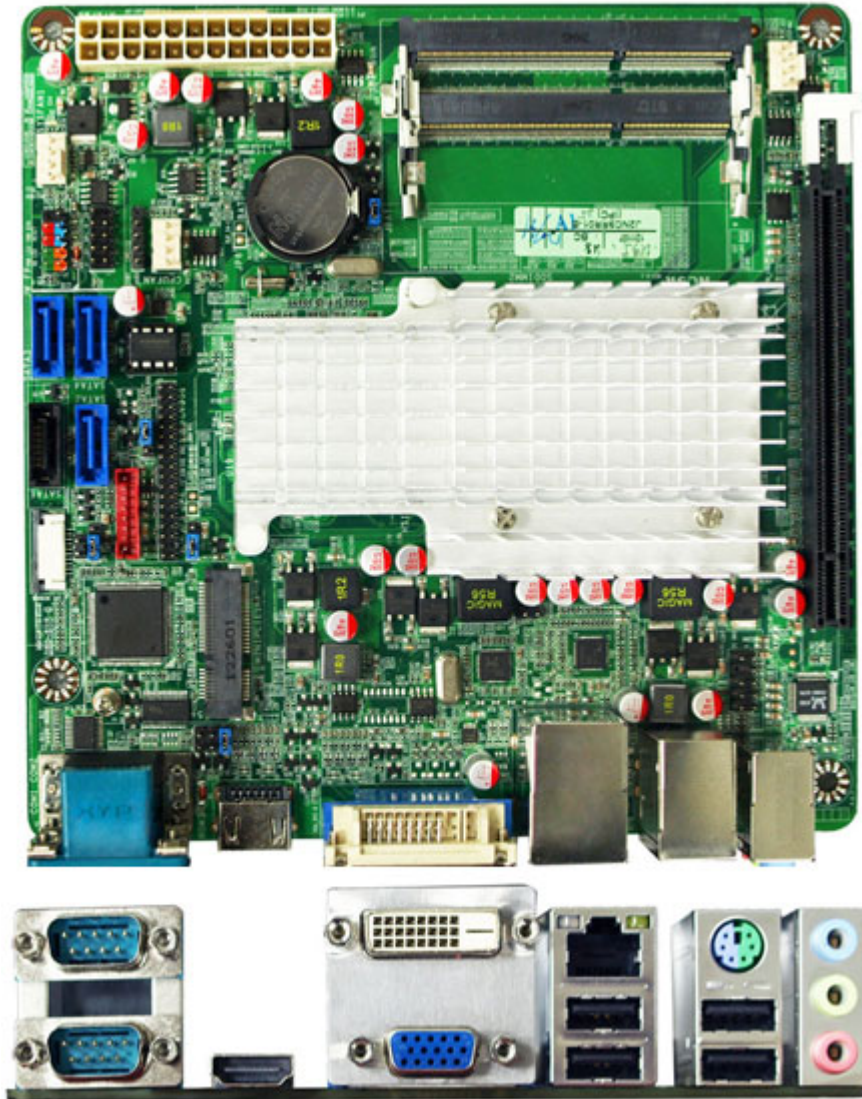

- INTEL® Celeron 847 Processor + NM70 Chipset
- Support 2 \* DDR3 1066/1333MHz Single CH up to 16GB
- Support DirectX 9 Graphics
- Support 3 \* Serial ATAII (3Gb/s) & 1 \* Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 \* 24 bits Dual Channel LVDS header
- Supports 1 \* Realtek RT8111F Gigabit LAN
- Support 2 \* COM ports (COM1 for RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| <b>CPU</b>             | INTEL® Celeron 847 Dual Core Processor (1.1GHz)          |
| <b>Chipset</b>         | INTEL®NM70 Express chipset                               |
| <b>Memory</b>          | 2 * DDR3 1066/1333MHz Single CH SO-DIMM up to 16GB       |
| <b>Expansion Slots</b> | 1 * PCI –E x 16 slot<br>1 * Mini PCI-E socket            |
| <b>Storage</b>         | 3 * Serial ATA2 3Gb/s & 1 * Aerial ATA3 6Gb/s connectors |
| <b>Audio</b>           | Realtek ALC662 6-Channel HD Audio                        |

|                           |                                                                                                                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Ethernet LAN</b>     | • 1 * RTL8111F PCI-E Gigabit LAN                                                                                                                                                                                           |
| • <b>LVDS</b>             | • Onboard 1 * 24-bits Dual channel connector                                                                                                                                                                               |
| • <b>USB</b>              | • Embedded 7 * USB 2.0/1.1                                                                                                                                                                                                 |
| • <b>Special Features</b> | • Support ACPI S3<br>• Support CPU Smart FAN<br>• Support Watch Dog                                                                                                                                                        |
| • <b>Rear Panel I/O</b>   | • 4 * USB 2.0/1.1 ports<br>• 1 * RJ-45 port<br>• 1 * PS/2 port<br>• 3 * Audio I/O ports ( Line-in, MIC and Line-out )<br>• 1 * VGA port<br>• 1 * DVI-D port<br>• 1 * HDMI port<br>• 2 * COM ports (COM1 for RS232/422/485) |
| • <b>Internal I/O</b>     | • 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports<br>• 2 * NB / Chassis Fan connectors;<br>• 1 * LVDS headers /1 * Inverter headers<br>• 1 * Front AUDIO header                                                                |
| • <b>BIOS</b>             | • AMI 32Mb UEFI DIP Flash ROM                                                                                                                                                                                              |
| • <b>Functional</b>       | • ATM, Automation, Medical Equipment, Kiosk, POS, General Application, Transportation                                                                                                                                      |
| • <b>Packing</b>          | • Color Box Dimension ■200(W) x 200(D) x 70(H)mm                                                                                                                                                                           |
| • <b>Certificate</b>      | • CE, FCC, RoHS                                                                                                                                                                                                            |
| • <b>Temperature</b>      | • Operating within 0~40 centigrade <b>(Suggest to use system FAN)</b><br>• Storage within -20-85 centigrade                                                                                                                |
| • <b>Form Factor</b>      | • Mini ITX Form Factor(17cmx17cm)                                                                                                                                                                                          |